

# STERALUX<sup>®</sup>

THE BEST MADE LIGHTING.


## SteraLux LINEAR

AN ENERGY EFFICIENT LED LIGHT FOR DIFFERENT LOCATIONS

SteraLux's SLIM LED lights are an energy efficient and environmentally friendly solution for indoor lighting. They are a perfect fit for, for example, storages and industrial locations. SteraLux's LINEAR LED-lights are easy to install and they have a long life span.

We customise the lighting according to your needs. You can modify features like beam angle, control systems, colour temperature, and mounting method. We provide lighting as a total solution, as we also offer design and installation services. We can also recycle your old lighting devices.

**USAGE: FACTORIES, STORAGES, OFFICES, SHOPPING CENTRES, SPORT CENTRES, SCHOOLS, HOSPITALS, SHOPS**

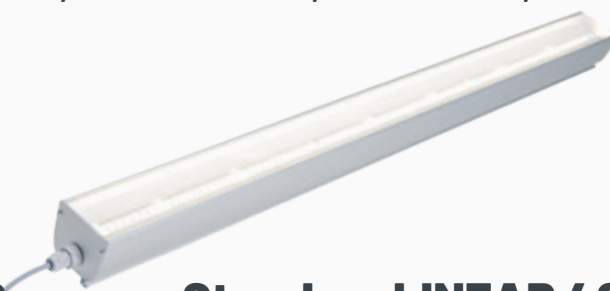

### SteraLux LINEAR 20

#### PRODUCT INFORMATION

<b>Power:</b>	20 W*)
<b>Luminous flux:</b>	2 600 lm*)
<b>Installation height:</b>	> 3 m
<b>Electrical number:</b>	4310900
<b>Color temperature:</b>	4 000/5 000 kelvin
<b>Installation:</b>	hang, rail, ceiling
<b>Length:</b>	1 200 mm
<b>Width:</b>	81 mm
<b>Height:</b>	75 mm
<b>Weight:</b>	3,5 kg
<b>Frame color options:</b>	aluminium, RAL colors
<b>Diffuser:</b>	bright, opal, microprisma
<b>CRI (color rendering):</b>	> 80
<b>Lighting control:</b>	on/off and DALI
<b>Operating hours:</b>	> 50 000 h
<b>Guarantee:</b>	5 y
<b>STUL guarantee:</b>	2 y
<b>Country of origin:</b>	Finland
<b>Luminary:</b>	LED
<b>Protection class:</b>	Class I
<b>IP class:</b>	IP44
<b>Operating temperature:</b>	-20 °C - +50 °C (D-class)
<b>Beam angle:</b>	55°/120°

**Frame material:** aluminium

\*)Power and luminous flux +/- 10 %

### SteraLux LINEAR 40

#### PRODUCT INFORMATION

<b>Power:</b>	35 W*)
<b>Luminous flux:</b>	4 500 lm*)
<b>Installation height:</b>	2,5-4 m
<b>Electrical number:</b>	4310901
<b>Color temperature:</b>	4 000/5 000 kelvin
<b>Installation:</b>	hang, rail, ceiling
<b>Length:</b>	1 200 mm
<b>Width:</b>	81 mm
<b>Height:</b>	75 mm
<b>Weight:</b>	3,5 kg
<b>Frame color options:</b>	aluminium, RAL colors
<b>Diffuser:</b>	bright, opal, microprisma
<b>CRI (color rendering):</b>	> 80
<b>Lighting control:</b>	on/off and DALI
<b>Operating hours:</b>	> 50 000 h
<b>Guarantee:</b>	5 y
<b>STUL guarantee:</b>	2 y
<b>Country of origin:</b>	Finland
<b>Luminary:</b>	LED
<b>Protection class:</b>	Class I
<b>IP class:</b>	IP44
<b>Operating temperature:</b>	-20 °C - +50 °C (D-class)
<b>Beam angle:</b>	55°/120°

**Frame material:** aluminium

\*)Power and luminous flux +/- 10 %

## SteraLux LINEAR 70

### PRODUCT INFORMATION

<b>Power:</b>	70 W*)
<b>Luminous flux:</b>	9 000 lm*)
<b>Installation height:</b>	5-7 m
<b>Electrical number:</b>	4310902
<b>Color temperature:</b>	4 000/5 000 kelvin
<b>Installation:</b>	hang, rail, ceiling
<b>Length:</b>	1 200 mm
<b>Width:</b>	81 mm
<b>Height:</b>	75 mm
<b>Weight:</b>	3,5 kg
<b>Frame color options:</b>	aluminium, RAL colors
<b>Diffuser:</b>	bright, opal, microprisma
<b>CRI (color rendering):</b>	> 80
<b>Lighting control:</b>	on/off and DALI
<b>Operating hours:</b>	> 50 000 h
<b>Guarantee:</b>	5 y
<b>STUL guarantee:</b>	2 y
<b>Country of origin:</b>	Finland
<b>Luminary:</b>	LED
<b>Protection class:</b>	Class I
<b>IP class:</b>	IP44
<b>Operating temperature:</b>	-20 °C - +50 °C (D-class)
<b>Beam angle:</b>	55°/120°

**Frame material:** aluminium

\*) Power and luminous flux +/- 10 %

## SteraLux LINEAR 150

### PRODUCT INFORMATION

<b>Power:</b>	150 W*)
<b>Luminous flux:</b>	18 000 lm*)
<b>Installation height:</b>	> 10 m
<b>Electrical number:</b>	4310904
<b>Color temperature:</b>	4 000/5 000 kelvin
<b>Installation:</b>	hang, rail, ceiling
<b>Length:</b>	1 575 mm
<b>Width:</b>	81 mm
<b>Height:</b>	75 mm
<b>Weight:</b>	4,5 kg
<b>Frame color options:</b>	aluminium, RAL colors
<b>Diffuser:</b>	bright, opal, microprisma
<b>CRI (color rendering):</b>	> 80
<b>Lighting control:</b>	on/off and DALI
<b>Operating hours:</b>	> 50 000 h
<b>Guarantee:</b>	5 y
<b>STUL guarantee:</b>	2 y
<b>Country of origin:</b>	Finland
<b>Luminary:</b>	LED
<b>Protection class:</b>	Class I
<b>IP class:</b>	IP44
<b>Operating temperature:</b>	-40 °C - +50 °C (D-class)
<b>Beam angle:</b>	55°/120°

**Frame material:** aluminium

\*) Power and luminous flux +/- 10 %

## SteraLux LINEAR 100

### PRODUCT INFORMATION

<b>Power:</b>	100 W*)
<b>Luminous flux:</b>	13 500 lm*)
<b>Installation height:</b>	7-10 m
<b>Electrical number:</b>	4310903
<b>Color temperature:</b>	4 000/5 000 kelvin
<b>Installation:</b>	hang, rail, ceiling
<b>Length:</b>	1 575 mm
<b>Width:</b>	81 mm
<b>Height:</b>	75 mm
<b>Weight:</b>	4,5 kg
<b>Frame color options:</b>	aluminium, RAL colors
<b>Diffuser:</b>	bright, opal, microprisma
<b>CRI (color rendering):</b>	> 80
<b>Lighting control:</b>	on/off and DALI
<b>Operating hours:</b>	> 50 000 h
<b>Guarantee:</b>	5 y
<b>STUL guarantee:</b>	2 y
<b>Country of origin:</b>	Finland
<b>Luminary:</b>	LED
<b>Protection class:</b>	Class I
<b>IP class:</b>	IP44
<b>Operating temperature:</b>	-40 °C - +50 °C (D-class)
<b>Beam angle:</b>	55°/120°

**Frame material:** aluminium

\*) Power and luminous flux +/- 10 %



*SteraLux's SLIM LED lights are an energy efficient and environmentally friendly solution for storages and industrial locations. They are easy to install and they have a long life span.*

# STERALUX®

**THE BEST MADE LIGHTING.**

STERA TECHNOLOGIES OY  
Tierankatu 5  
FI-20520 Turku  
info@steralux.fi  
tel. +358 (0) 2 517 0300